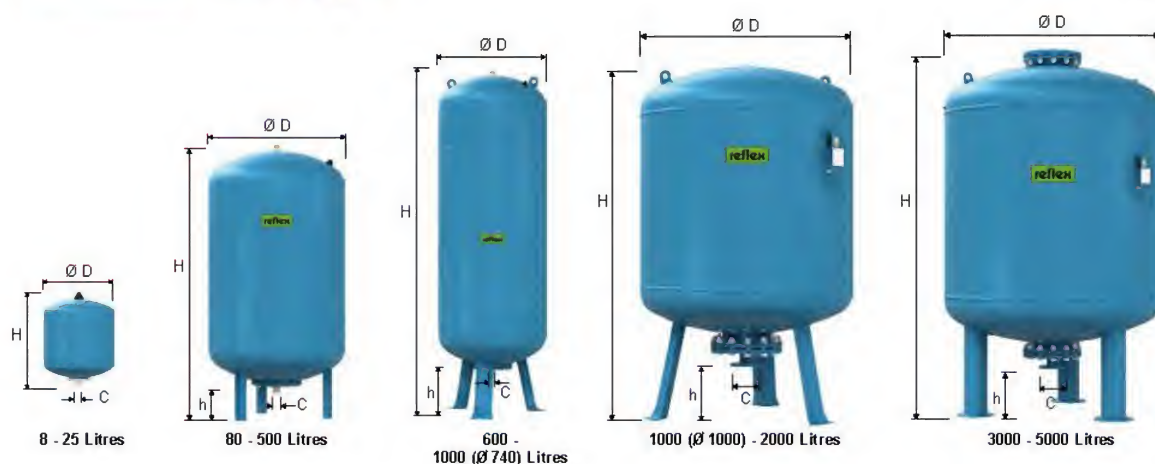


'reflex DE'

16 bar

WRAS
APPROVED
PRODUCT

CE
ACS


Type	Article-No.	Weight kg	Product group	Ø D mm	H mm	h mm	C
16 bar / 70 °C							
DE 8	7301006	2.0	40	206	320	---	G ¾
DE 12	7302105	2.8	40	280	310	---	G ¾
DE 25	7304015	4.2	40	280	500	---	G ¾
DE 80	7348600	24	42	480	730	150	G 1
DE 100	7348610	27	42	480	835	150	G 1
DE 200	7348620	54	42	634	970	145	G 1¼
DE 300	7348630	63	42	634	1270	145	G 1¼
DE 400	7348640	111	42	740	1395	265	G 1½
DE 500	7348650	123	42	740	1615	265	G 1½
DE 600	7348660	167	42	740	1860	265	G 1½
DE 800	7348670	217	42	740	2325	265	G 1½
DE 1000 Ø 740	7348680	252	42	740	2604	265	G 1½
DE 1000 Ø 1000	7312805	519	44	1000	2010	290	DN 65 / PN 16
DE 1500	7312905	674	44	1200	2030	290	DN 65 / PN 16
DE 2000	7313005	884	44	1200	2500	290	DN 65 / PN 16
DE 3000	7313105	1229	44	1500	2570	320	DN 65 / PN 16
DE 4000	7354100	1344	44	1500	3145	320	DN 65 / PN 16
DE 5000	7354300	1596	44	1500	3680	320	DN 65 / PN 16

V_n Nominal volume [Litres]

Réservoir sous pression
refix DE 600
16 bar – 70°C

